


HD CCTV Total Solution

5MP IR Dome Camera User Manual



Please use this camera with a recorder which supports HD video recording.
Please read the instructions thoroughly before using the product.



CAUTION

RISK OF ELECTRIC SHOCK



CAUTION:

To reduce the risk of electric shock, do not expose this apparatus to rain or moisture.

Only operate this apparatus from the type of power source indicated on the label.

The company shall not be liable for any damages arising out of any improper use, even if we have been advised of the possibility of such damages.



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



This exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.



ROHS Announcement

All lead-free products offered by the company comply with the requirements of the European law on the Restriction of Hazardous Substances (RoHS) directive, which means our manufacture processes and products are strictly "lead-free" and without the hazardous substances cited in the directive.



The crossed-out wheeled bin mark symbolizes that within the European Union the product must be collected separately at the product end-of-life. This applies to your product and any peripherals marked with this symbol. Do not dispose of these products as unsorted municipal waste.



CE Mark

This apparatus is manufactured to comply with the radio interference.

The company does not warrant that this manual will be uninterrupted or error-free. We reserve the right to revise or remove any content in this manual at any time.


FEATURES

1. 1/2.5" CMOS Sensor with up to 5MP video output
2. Low light sensitivity of 0.1 Lux / F1.8, 0Lux (IR LED ON)
3. Quadbrid video output with TVI, CVI, AHD & CVBS
4. DWDR to increase image recognizability in overexposure and dark areas
5. Day and night 24-hour surveillance with IR effective distance up to 50 meters
6. IP66 for weather-proof application
7. Camera parameters adjustable when used with HD CCTV DVR

PACKAGE CONTENT

- IR dome camera
- User manual
- Wrench
- Screws & wall plugs

DIMENSIONS*

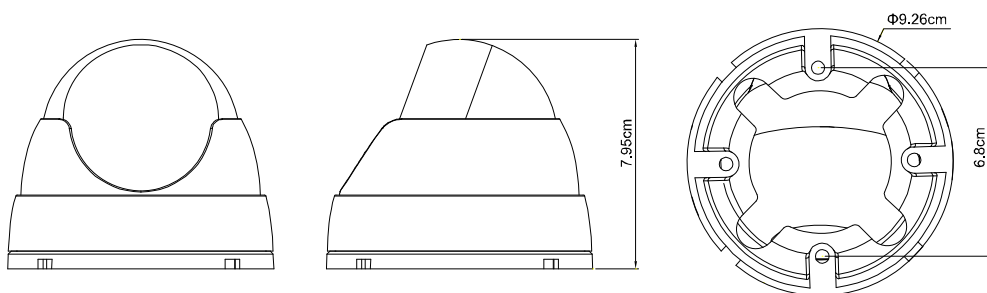

*Dimensional Tolerance: $\pm 5\text{mm}$


SPECIFICATIONS*

Video Mode	TVI, CVI, AHD & CVBS switchable
Pick-up Element	1/2.5 " CMOS image sensor
Number of Pixels	2560 (H) x 1920 (V)
Video Frame Rate	5MP@ 20fps
Min. Illumination	0.1 Lux / F1.8, 0 Lux (IR LED ON)
S/N Ratio	More than 48dB (AGC OFF)
Shutter Speed	AUTO : 1/25(30)sec~1/50,000sec
Lens	f3.6mm / F1.8
Lens Angle	96° (Horizontal) / 50° (Vertical) / 116° (Diagonal)
IR LED	2 units
IR Effective Distance	Up to 50 meters
IR Shift	YES
Day & Night Mode	YES
Noise Reduction	YES
IRIS Mode	AES
White Balance	AUTO
AGC	AUTO
Sharpness	Adjustable
Flickerless	50HZ / 60HZ / OFF
BLC	Adjustable
DWDR	YES
IP Rating	IP66
Operating Temperature	-20°C ~ 40°C
Operating Humidity	90% or less relative humidity
Power Source ($\pm 10\%$)	DC12V / 0.5A
Current Consumption ($\pm 10\%$)	100mA (IR LED OFF); 240mA (IR LED ON)
Net Weight (kg)	0.32
Optional Peripherals	Junction Box (AVA456-BKT / AVA456-HBKT)

* The specifications are subject to change without notice.

INSTALLATION


Step1: Disassemble the camera case into three parts as illustrated in *Figure 1*.

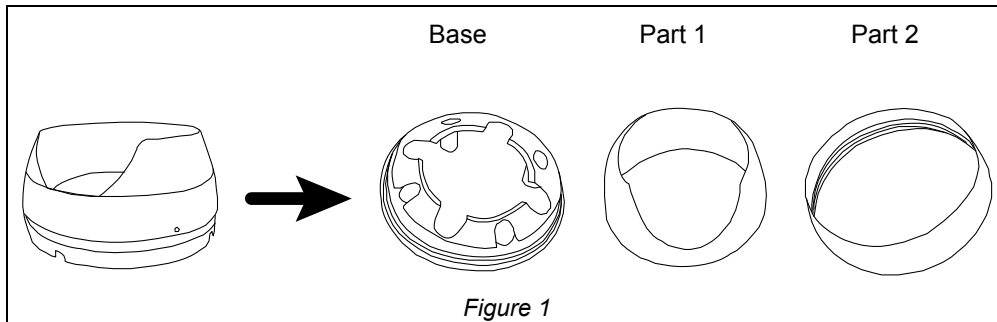

Step2: Locate where you want to install this camera (wall or ceiling), and drill holes on the wall or ceiling for securing the bracket and routing the cables (if necessary).


Step3: Attach the bracket to the wall (or ceiling), and make sure the cables are routed and arranged properly in the bracket, as shown in *Figure 2*.

Step 4: Secure the bracket to the wall (or ceiling), as shown in *Figure 3*.

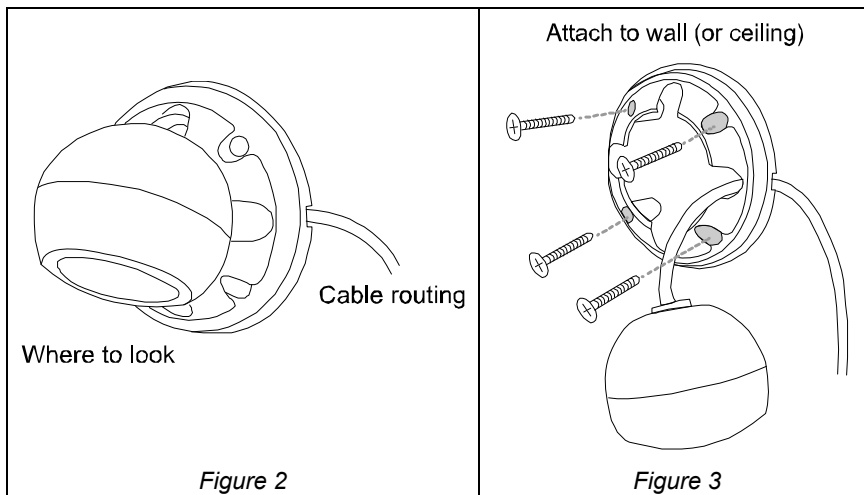

Step 5: Slightly adjust the camera lens to where it's supposed to face, and replace Part 1 and Part 2 back, as shown in *Figure 4* and *Figure 5*.

Note: Do not install the lens opposite down. (Refer to *Figure 6*).

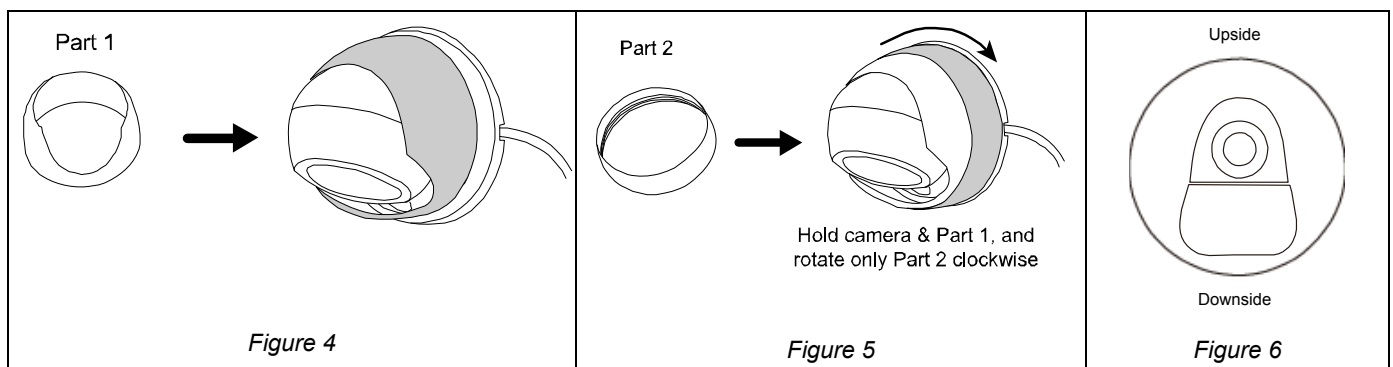

Step6: Power on the camera and fine-tune the viewing angle.

Step7: Adjust the position and the viewing angle of the camera, if necessary.

CONNECTION

1. DC12V Input Terminal

Connect the power terminal of the camera to a DC 12V regulated power supply.

Note: Please use the correct power adaptor, DC12V (regulated), to operate this unit. The power tolerance of this unit is $DC12V \pm 10\%$. Over maximum DC 12V power input will damage this unit.

2. Video Output Connector (VIDEO OUT)

Connect the camera video output to the video input of a DVR with 75Ω coaxial cable.

Note: To ensure the camera has sufficient protection against moisture, an extra waterproof measure, such as by using an insulating tape, must be used to cover the power and video connectors after connection.


CAMERA PARAMETERS


This camera series has its own configuration menu.

Note: The access path is taking our HD CCTV recorder as an example. If you're using other brand's recorder, please refer to its own user manual to know how to access the camera parameters.




Based on the recorder type you have, on the live view:


Type 1

Click twice on the channel that this camera is connected to show in full screen, and click on  on the right side to display the PTZ control panel.


Then, click on  (Enter) on the PTZ control panel to show the configuration menu of this camera, and use the arrow keypad to choose between each option.


When the camera menu is entered, use keypad to move between and change those configurations.

-  Move between selections.
-  Change settings.
-  Call the camera parameters menu or enter the currently-selected item.

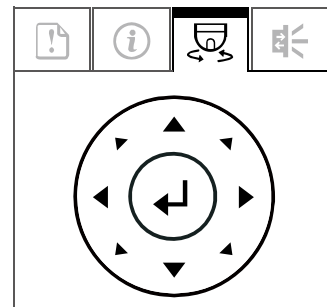




Type 2

Click twice on the channel that this camera is connected to show in full screen, and click  on the bottom left of the channel to show the PTZ control panel.

Then, click on  (Enter) on the PTZ control panel to show the configuration menu of this camera, and use the arrow keypad to choose between each option.



-  Move among sub-menus.
-  Change settings.
-  Call the camera parameters menu or enter the currently-selected item.

MENU				REMARK
MAIN-MENU	AE	BRIGHTNESS	1 ~ 10	
		EXPOSURE MODE	GLOBAL	
	AWB	MODE	ATW	
			MWB	Manually adjust the white balance parameters by modifying R / B gain parameters.
	DAY - NIGHT	MODE	EXT	Use the external light sensor we added in the camera to detect the surrounding light condition and switch to color or B/W mode.
			AUTO	
			COLOR	
			BW	
VIDEO ENHANCE		CONTRAST	1 ~ 10	
		SHARPNESS	1 ~ 10	
		COLOR GAIN	1 ~ 10	
		DNR	1 ~ 10	
		MIRROR	DEFAULT	
			H	Horizontal
			V	Vertical
D-WDR	OFF / ON			
VIDEO OUTPUT	HD	TVI / CVI / AHD / CVBS		
	VIDEO STANDARD		Choose the video resolution and IPS of this camera in different video output mode.	
	REBOOT&APPLY			
LANGUAGE		ENGLISH / SIMPLIFIED CHINESE / TRADITIONAL CHINESE / RUSSIAN / ITALIAN / PORTUGUESE		
RESET				
SAVE-EXIT			Save the changes and exit the menu.	
EXIT			Exit the menu without saving	